

To Be Rescinded1301:7-7-09 Bowling establishments.

(A) Section FM-901.0 General

(1) FM-901.1 Scope: The equipment, processes and operation of bowling establishments shall comply with this rule.

(2) F-901.2 Approval required: Approval shall be obtained from the code official for bowling pin refinishing and bowling lane resurfacing operations involving flammable liquids or materials.

(B) Section FM-902.0 Special conditions

(1) FM-902.1 General: The operation and maintenance of bowling establishments shall comply with paragraphs (B)(2)(FM-902.2) through (B)(5)(F-902.5) of this rule.

(2) FM-902.2 Lane resurfacing operations: Lane resurfacing operations shall be in accordance with paragraphs (B)(2)(a)(F-902.2.1) through (B)(2)(c)(F-902.2.3) of this rule.

(a) F-902.2.1 Notification: The code official shall be notified when the bowling lanes are to be resurfaced. Resurfacing operations shall be prohibited when the establishment is open to the public.

(b) F-902.2.2 Ventilation: Mechanical ventilation shall be provided to remove flammable vapors. Air-recirculation shall be prohibited during resurfacing operations and within 1 hour following the application of flammable finishes.

(c) F-902.2.3 Ignition sources: All electric motors or other equipment in the area that is a source of ignition shall be shut down. All smoking and open flames shall be prohibited during the application of flammable finishes and within 1 hour following the application of flammable finishes.

(3) FM-902.3 Pin refinishing: Pin refinishing involving the application of flammable finishes shall be performed in a special room complying with the building code listed in rule 1301:7-7-44 of the Administrative Code. Smoking shall be prohibited at all times in refinishing rooms.

(a) F-902.3.1 Power tools: All power tools in the room shall be effectively grounded.

(b) FM-902.3.2 Storage of flammable liquids: Storage of flammable or combustible liquids in such rooms shall not exceed a combined aggregate of 60 gallons (227 L), in original metal containers or approved safety containers of 5-gallon (19 L) individual capacity in accordance with rule ~~1301:7-7-32~~ 1301:7-7-28 of the Administrative Code.


(4) F-902.4 Waste materials: A metal waste can with a self-closing cover shall be provided for all waste materials and rags, and the contents shall be disposed of daily.

(5) F-902.5 Dust collection: An approved metal box or other receptacle shall be provided for the catching of dust thrown off during operation from lathes, sanding and buffing machines. The contents

1301:7-7-09

shall be removed daily and disposed of safely.

Effective: January 3, 2000

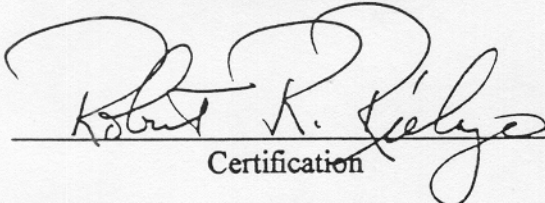

Certification

November 17, 1999
Date

Promulgated under:	R.C. Section 119.03
Rule amplifies:	R.C. Section 3737.22
Authorized by:	R.C. Section 3737.82
R.C. 119.032 Review Date:	1/01/03
Prior effective date:	7/01/79;6/01/85;6/15/92;7/1/93;9/1/95;3/30/98

Effective:

R.C. 119.032 review dates: 11/23/2004

WITHDRAWN ELECTRONICALLY

Certification

06/10/2005

Date

Promulgated Under: 119.03
Statutory Authority: 3737.82, 3737.86
Rule Amplifies: N/A
Prior Effective Dates: 7/1/79, 6/1/85, 6/15/92, 7/1/93, 9/1/95, 3/30/98, 1/3/00